(1) smooth moulding 70 x 10

(3) hinge with double wing Ø16

(5) frame 65 x 66 (6) fire-proof foam (9) stonework wall


(2) leaf


(10) plasterboard wall

- (7) silicon mastic (only sound proof variation)
- (11) solid wood put in the tubular of drywall

(4) thermo-extending seal

(8) sub-frame

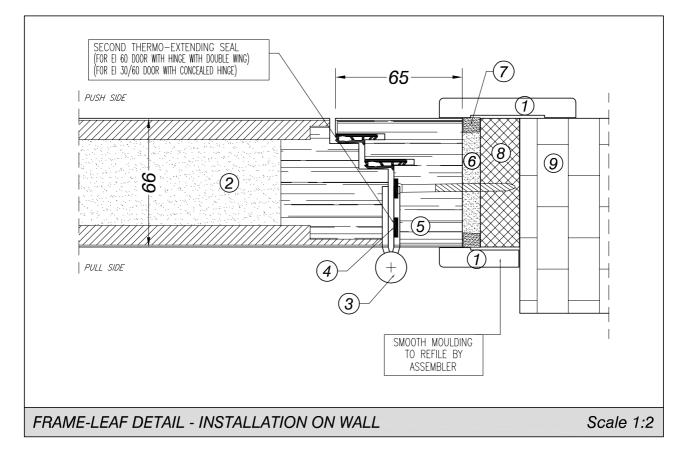

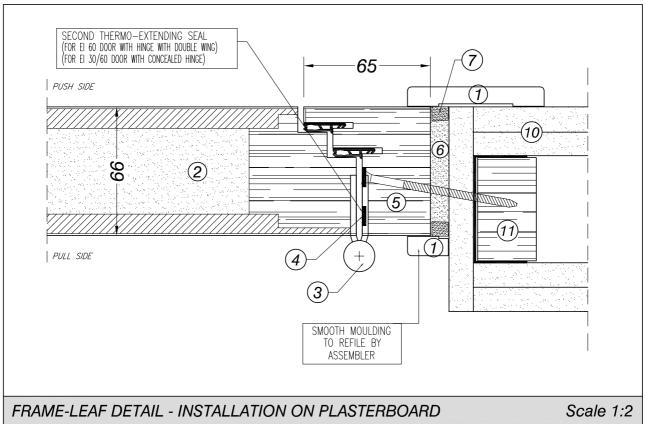



SEBINO CHIUSURE Srl I - 24020 Scanzorosclate (BG) Via XXV Aprile, 21 Tel. 035.24.27.10 Fax 035.24.47.37 www.sebinochlusure.it Info@seblnochlusure.lt

FIRE-PROOF DOOR EI 30/60

SOUND PROOF 43 dB

- DOOR CERTIFIED EN 1634.1 $_$ UNI EN ISO 140/3 $_$ UNI EN ISO 717/1 -FRAME - LEAF DETAIL